



Revillusion®

36" Built-in Electric Firebox

RBF36

The Future of
Fireplaces is Clear.™



Revillusion® is a completely new way of looking at fireplaces, and changing the standard for electric. A clear view through the lifelike flames, to the full brick interior, captures the charm of a wood-burning fireplace. Enjoy the look of a fireplace cut straight from the pages of a magazine by choosing Revillusion®; clearly a better fireplace.
















Revillusion® 36" Built-in Electric Firebox

RBF36

Capacitive touch built-in controls.



Features

-  **Revillusion® Flame Technology**
Flames are larger, brighter and more random, appearing from within the logs.
-  **Mirage™ Flame Panel**
Partially frosted acrylic panel is clearly better than a mirror, showing only dazzling flames and no reflections.
-  **ThruView™ Full-depth Design**
See clear through the flames to the back of the firebox for a more authentic experience.
-  **Mood Lighting**
Customize the firebox glow with a choice of warm hues, plus midnight mode.
-  **Color Enhancement**
Adjust the flame base color to red or blue.
-  **Reals™ Plus**
A full grate of life-size hardwood-cast logs, tiered for greater depth.
-  **Full Brick-surround Firebox**
More authentic day or night; 270-degree herringbone brick with natural soot markings.
-  **Brightness and Flicker**
Adjust light level to suit the room and choose flicker effect for enhanced firelight.
-  **Ambient Light Sensor**
Automatically adjusts firebox light to suit the room day to night.
-  **Quick and Easy Installation**
Simply frame, wire and finish – no venting, gas lines or safety screens.
-  **Primary Heat**
Option to use 240 volt supply for up to 8,800 BTU - use as part of primary heating plan; heater also operates without flame and can be deactivated.
-  **All-season Flames**
Enjoy the unique charm of a fireplace 365 days a year using the flames without the heat.
-  **Direct-wire**
Designed to be direct-wired to a 120, 208 or 240 volt circuit for a seamless look (optional plug kit available).

Accessories



36" Tempered Front Glass
Dimensions:
35-1/8" W x 22-1/8" H x 3/8" D
(89.1 cm x 56.1 cm x 1.1 cm)



36" Functional Doors with Tempered Glass
Dimensions:
39-3/4" W x 27-1/4" H x 1-1/4" D
(101.1 cm x 69.4 cm x 3.7 cm)

120 V | 1,375 W | 4,400 BTU
208 V | 1,975 W | 6,745 BTU
240 V | 2,575 W | 8,794 BTU

Mood-maker Remote
Customize the light color and intensity for a fireplace that reflects your personality.



Model #	Description	Lbs / Kg	UPC	Wty*	Carton Dimensions (WxHxD)		Cube	
					Inches	cm	ft³	m³
RBF36	36" Built-in Electric Firebox	74.9 / 34.0	781052 104723	2 yrs.	41-1/4 x 15-1/4 x 31-7/8	104.6 x 38.7 x 81.0	11.6	0.3
RBFPLUG	Plug Kit	0.6 / 0.3	781052 107656	1 yr.	7 x 3 x 4	17.8 x 7.6 x 10.2	0.05	0.00
RBFGLASS36	Single Glass Pane	25.1 / 11.4	781052 108011	1 yr.	42-1/8 x 29-1/4 x 4-1/4	106.8 x 74.2 x 10.6	3.0	0.08
RBFDOOR36	36" Glass Door	32.7 / 14.7	781052 108059	1 yr.	41-7/8 x 30-1/8 x 4-5/8	106.3 x 76.4 x 11.6	3.3	0.09

Specifications, finishes and dimensions are subject to change. *Limited warranty. ©2017 Dimplex North America Limited.


SE-329-R07-083017

Revillusion®


36" Built-in Electric Firebox

RBF36


Product Dimensions:

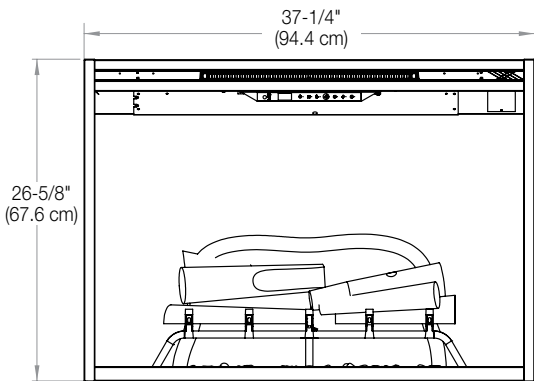

FRONT


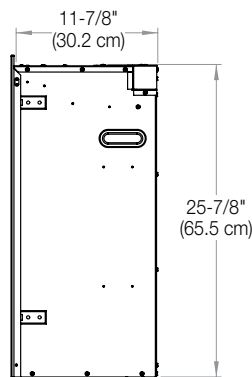


SIDE

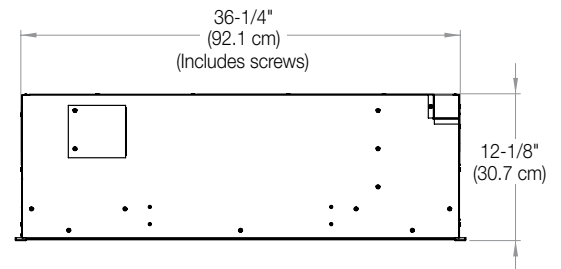

TOP

Framing Dimensions:

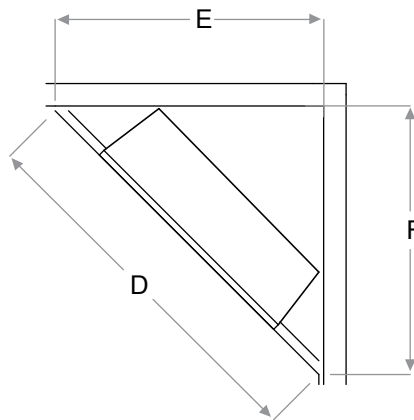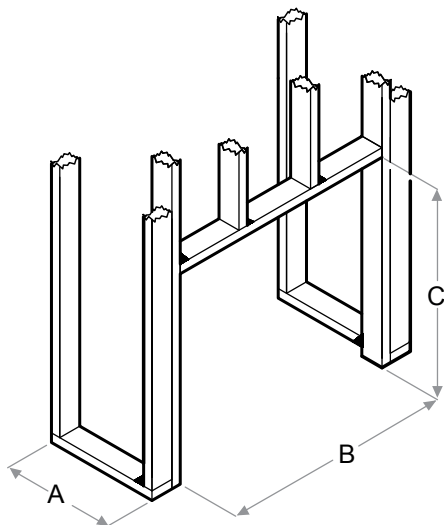

NOTE: The materials used for the finished surround must be cut to precise dimensions as the 1/2" (1.3 cm) self-trimming flange is only to create a finished appearance.

RBF36

A	B	C	D	E	F
12-1/2" (31.8 cm)	36-5/8" (93.0 cm)	26-1/4" (66.5 cm)	60" (152.4 cm)	42-1/2" (108.0 cm)	42-1/2" (108.0 cm)